

**CELLULAR CONCRETE SCREW, T30**

Selftapping screw anchor with coarse thread.

**TYPE CBS**



**ADVANTAGES**

- Installation without predrilling.
- Direct installation, without special tools.
- Special anti-corrosion coating.

**FUNCTIONING**

- Push-through installation.
- When used in solid masonry, predrill with 6mm.

**CELLENBETONSCHROEF MET VERZONKEN KOP, T30**

Zelftappende schroef met grove draad.

**VOORDELEN**

- Montage zonder voorboren.
- Directe montage, zonder speciale benodigdheden.
- Speciale roestwerende coating.

**TOEPASSING**

- Doorsteekmontage.
- Bij gebruik in volle baksteen, voorboren met 6mm.

**VIS POUR BÉTON CELLULAIRE TÊTE FRAISÉE, T30**

Vis autotarodeuse avec filet large.


**AVANTAGES**

- Montage sans préforage.
- Montage rapide, sans devoir attendre.
- Revêtement anti-corrosion.

**APPLICATION**


- Installation traversante.
- Si utilisé dans des briques pleines, préforez avec 6mm.

**INSTALLATION SCHEME**

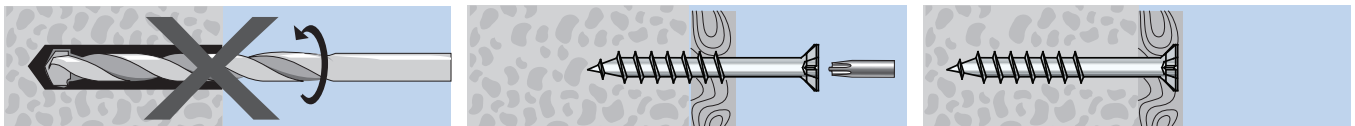



INFO

d	l	$h_{ef}$	$t_{fix}$
[mm]	[mm]	[mm]	[mm]
8	65	60	5
8	90	60	30
8	110	60	50
8	130	60	70

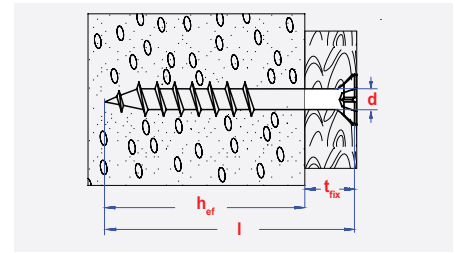

Carton box packing - Kartonverpakking - Boîte carton

size	pgb code	EAN13	
8x65	SMCBS380065 Z	5902134194417	100
8x90	SMCBS380090 Z	5902134194424	100
8x110	SMCBS380110 Z	5902134194431	100
8x130	SMCBS380130 Z	5902134194448	50



LOADS - BELASTINGEN - CHARGES

Recommended loads for a single anchor. <sup>1)</sup>

Maximaal aanbevolen belasting voor één anker.

Charges maximales recommandées pour un ancrage simple.

Type CBS			ø 8
Aerated concrete / Cellenbeton / Béton cellulaire	≥ PP2, PB2(G2)	[kN]	0,06
Aerated concrete / Cellenbeton / Béton cellulaire	≥ PP4, PB4(G4)	[kN]	0,31

<sup>1)</sup>including / inclusief / inclusif safety factor 5.